



OptoTech

SPO 30 CNC

Low-Priced CNC-Controlled Polishing Machine for Optics up to Ø 30 mm





The OptoTech polishing machine SPO 30 CNC is the ideal low cost version of a high speed CNC polisher. The universal working range and the easy usage combined with up to date polishing technology offers a contemporary alternative to our long proven SPO 30. The price-performance-ratio of this machine will elate you.



OptoTech

Datos técnicos

	SPO 30 CNC
Working Range Diameter	2 mm - 30 mm
Working Range Radius	+/- 5 mm to plano
Dressing Spindle	Velocidad de giro: 100 - 5000 rpm, infinitely variable; Interfaz: Flange
Tool Spindle	Velocidad de giro: 30 - 2500 rpm, infinitely variable; Interfaz: HD 12
Workpiece Spindle	Velocidad de giro: 30 - 2500 rpm, infinitely variable; Interfaz: HD 12
Vacuum	-0.7 bar
Requisitos de presión de aire	6 bar
Requisitos eléctricos (otros bajo pedido)	5 kW / 400 V / 50 Hz
Dimensiones	Ancho: 1000 mm, Altura: 1800 mm, Profundidad: 1250 mm
Peso (aprox.)	800 kg

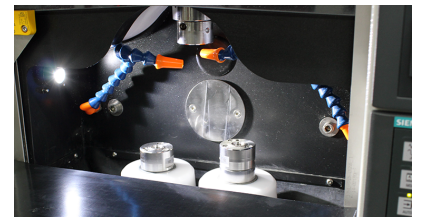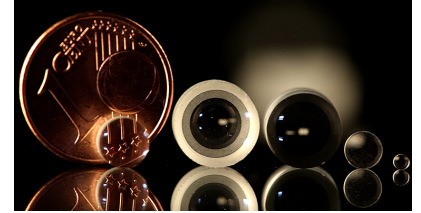

Características destacadas

- Low-Priced CNC-controlled polishing machine with oscillation movement of the polishing tool around the lens center
- 3-spindle version (workpiece spindle, dressing spindle, tool spindle)
- CNC-controlled oscillation movement in radii center
- Integrated polishing tool correction technology OCT (OptoTech Correction Technology)
- OptoTech user interface, Microsoft Windows
- Input of all parameters via dialogue menu

Ventajas del sistema

- Low-Priced CNC-controlled polishing machine
- Ideal for supermicro and endoscopy optics
- Energy-efficient motors: Possible energy savings up to 30% (depending on required power)

Características de rendimiento

Standard cycles:

- Polishing in SynchroSpeed mode
- Dressing of polishing tools
- Other technologies available on request

Opciones

- Exhaust filter system for mist collection
- Polishing tank



OptoTech