



OptoTech

SPK 80 CNC

CNC-Controlled Polisher for a Wide Range of Optical Components





The polishing machine SPK 80 CNC is an all-round high-end machine for high precision polishing of a wide spectra of optical components. The SPK 80 CNC is the perfect complement to our SM 80 CNC TC grinding machine, delivering a balanced cycle time for grinding and polishing.



OptoTech

Datos técnicos

	SPK 80 CNC
Working Range Diameter	15 mm - 80 mm
Travel B	-75 ° - 75 °
Travel X	0 mm - 230 mm
Travel Y	-2.5 mm - 2.5 mm
Travel Z	0 mm - 110 mm
Tool Spindle	Velocidad de giro: 0 - 3000 rpm; Accionamiento: Motor spindle direct drive; Interfaz: HD 25
Workpiece Spindle	Velocidad de giro: 0 - 2000 rpm; Accionamiento: AC servo driven; Interfaz: HD 25
Vacuum	-0.7 bar
Requisitos de presión de aire	5 bar
Requisitos eléctricos (otros bajo pedido)	7 kW / 400 V / 50/60 Hz
Dimensiones	Ancho: 1500 mm, Altura: 2020 mm, Profundidad: 1350 mm
Peso (aprox.)	2000 kg

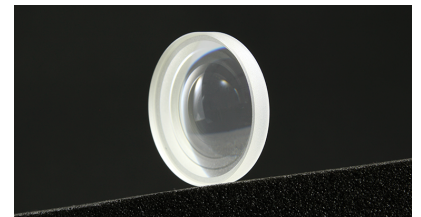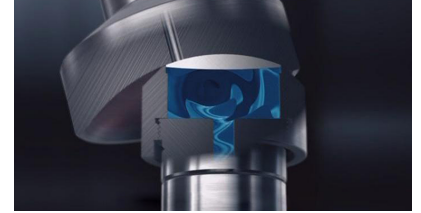

Características destacadas

- Versatile machine for polishing, equipped with tools for polishing or for ultra-fine grinding using pellet tools
- 3 spindle machine with integrated dressing tool spindle
- CNC-controlled Y-axis for cross-grinding adjustment during the dressing process
- Pivoting Angle -90° to 75°
- Coolant control
- Preparation for filter exhausting device
- Siemens Sinumerik One controller with OptoTech user interface

Características de rendimiento

Technologies:

- AST (Advanced Setup Technology, aka: Touch Setting)
- Multi-Tool-Concept
- Polishing of optical components
- HydroSpeed Polishing for optimal polishing results and polishing without protective paint
- Ball pin processing for high aperture optics

Opciones

- Remote diagnostics
- Polishing tanks and chiller for polishing tanks
- Filter exhausting device
- Vacuum device
- Adjustable vacuum unit
- Integrated drive cooling



OptoTech