



OptoTech

SPK 150 CNC

CNC-Controlled Polishing Machine for Optics up to Ø 150 mm






The polishing machine SPK 150 CNC is an allround high-end machine for high precision polishing of spherical and aspherical optical components. The SPK 150 CNC along with the SM 150 CNC generator form an ideal production cell with balanced cycle times between grinding and polishing. This combination forms a production line consisting of only two machines with no idle time while one machine waits for the other.



Datos técnicos

	SPK 150 CNC
Working Range Diameter	10 mm - 150 mm
Working Range Diameter (aspheres)	10 mm - 200 mm
Max. Tool Diameter	280 mm
Tool Spindle	Velocidad de giro: 0 - 2000 rpm; Interfaz: HD 25
Workpiece Spindle	Velocidad de giro: 0 - 2000 rpm; Interfaz: HD 25
Vacuum	-0.7 bar
Requisitos de presión de aire	6 bar
Requisitos eléctricos (otros bajo pedido)	8 kW
Dimensiones	Ancho: 2000 mm, Altura: 1990 mm, Profundidad: 1850 mm
Peso (aprox.)	2540 kg

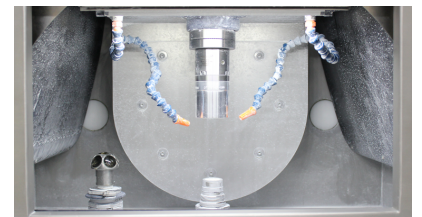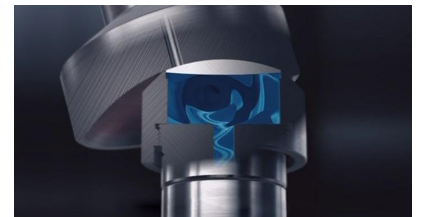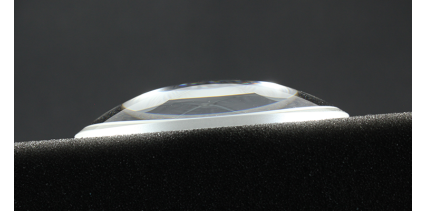

Características destacadas

- For polishing of a wide variety of optical components
- Innovative polishing technologies for optimal polishing results
- Pivoting Angle +/- 55° (+55°/-48° for version with automation)
- Coolant control
- LAN-Connection
- Preparation for filter exhausting device

Características de rendimiento

Technologies:

- AST (Advanced Setup Technology, aka: Touch Setting)
- Polishing of optical components
- HydroSpeed Polishing for optimal polishing results and polishing without protective paint
- Ball pin procesing for high aperture optics

Opciones

- 2-, 3- or 4-spindle version available
- Remote diagnostics
- Supported by OptoTool
- Automation (Portal loader with disc magazine and workpiece rinsing)
- Polishing tanks and Chiller for polishing tanks
- Filter exhausting device
- Vacuum device